

# nifty 170

With one of the largest working envelopes in its class, the Nifty 170 delivers maximum reach with stability and control. Octagonal boom sections provide strength without compromising on weight and the telescopic upper boom improves accuracy when positioning. Hydraulically operated outriggers and controls make setting up and operating quick and easy, especially on uneven surfaces.

## Safety Features

- ▶ Pressure sensitive outriggers with audible & visual alarms
- ▶ Dual controls (platform & base)
- ▶ Emergency descent system with hand-pump
- ▶ Lock valves on all hydraulic cylinders
- ▶ Double acting cylinders
- ▶ Overrun brake system with gas spring handbrake
- ▶ CE Mark




The Nifty 170's outstanding reach makes it ideal for a wide range of applications.

Also available on a self-driveable 2x4 or 4x4 base the Nifty 170SD.



Fully proportional hydraulic outriggers make setting up and levelling quick and easy even on gradients.

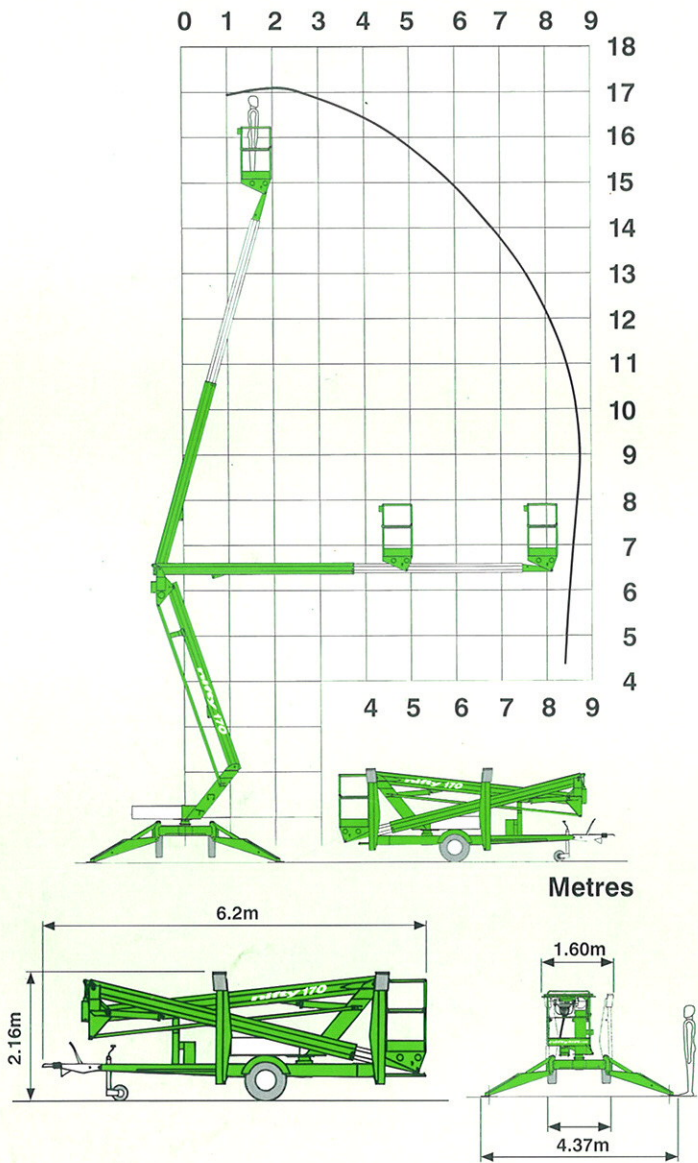

## Specifications

Working Height	17.10m	56ft 1in
Platform Height	15.10m	49ft 6in
Outreach	8.70m	28ft 6in
Slew	360°	
Travelling Width	1.60m	5ft 3in
Working Width	4.37m	14ft 4in
Height Stowed	2.16m	7ft 1in
Overall Length	6.20m	20ft 4in
Weight (dependent on options)	1900kg - 2000kg	4180lbs - 4400lbs
Platform Rotation	100° (optional)	
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 8in x 2ft 1in
Control Systems	Fully proportional hydraulic controls	
Outriggers	Hydraulic and manual options available	
Power Options	Bi-Energy (engine and battery) Mains only Battery only Petrol or diesel engine only	

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.